

CYLINDRICAL CAN



Ø99mm



PRESSURE LID



CONICAL DRUM,
WITH PLACE
FOR PLASTIC INSERT

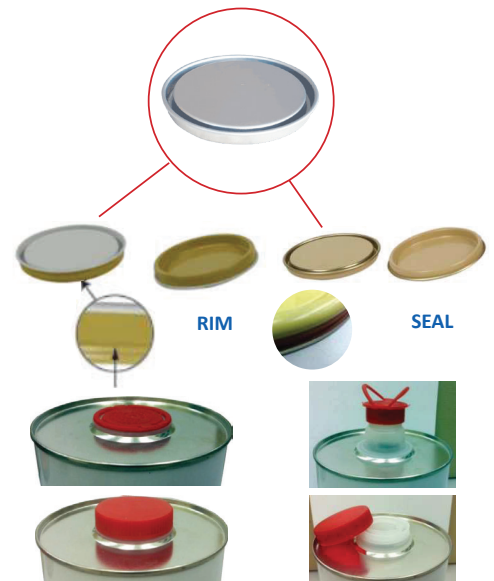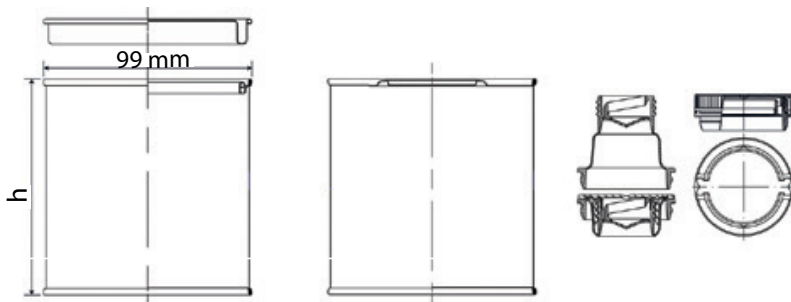

Size, L	0,5	0,55	0,75	0,85	0,95	1,0	1,2
Height, mm	80	86	110	120	136	148	160
Quantity per pallet (1 200*800 mm), pcs	1092	1092	819	728	637	637	546
Quantity of rows on pallet	12	12	9	8	7	7	6

APPLICATION

Storage and transportation of paint, lubricants, construction materials, various chemical and petrochemical products.

GENERAL SPECIFICATIONS

- Double bottom seaming
- Longitudinal weld seam – Wima
- RL - ring (rolled edge of the ring)

INTERNAL COATING

- Gold
- Pigmented
- White

EXTERNAL COATING

- Basecoats
- Varnishes

SIDE STRIPE COATING

- Liquid
- Powder

CLOSURE TYPES

- Pressure lid, with or without rim
- Pressure lid, with or without sealant
- Conical drum, with place for plastic insert, pull spout (Ø 42,3 mm with internal pull-out neck)
- Conical drum, with place for plastic insert, pull spout (Ø 42,3 mm with thread)